



## LED Strip TUDO Side View



- Side emitting LEDs
- Suitable for decorative applications
- Compatible with the TUDO modular system



Operating voltage:	DC 12 V
Dimensions:	8x mm
Power:	4.8 W/m
Color temperature:	Warm white (3000 K) Natural white (4000 K)
Color rendering index (CRI):	>90
Luminous flux:	530 lm/m
Luminous efficacy:	103 lm/W
LED lifespan:	30000 h
Number of LEDs:	60/m
Separation:	3/50 mm
Beam angle:	120°
IP protection rating:	IP20
Color:	White
Cable length:	1800 mm


### Photometrics

CRI	L= 5000 mm	3000 K	4000 K
		782 lx	958 lx
		419 lx	506 lx
		239 lx	286 lx
		162 lx	192 lx

**!** Maximum allowed strip length: 7500 mm

LED Strip TUDO Side View	Length (mm)	Power (W/m)	Color Temperature (K)	Ref.
Tudo Side View	5000	4.8	3000	2000498
			4000	2000499

### Dimensions

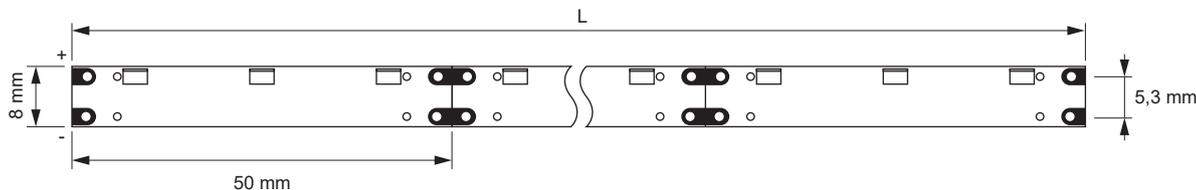

### Connectors COB/SMD 8 mm, 12 V



### LED converters 12 V



Connectors COB/SMD	Length (mm)	Ref.
1 Power cord 12 V	1800	2000982
2 Connection cable	50	2000979
	400	2000980
	700	2000981
3 Connector (PU 10 pcs.)		2000977
4 Corner connector (PU 10 pcs.)		2000978

LED converter 12 V	Ref.
15 W	2000420
30 W	2000421
60 W	2000422

For additional switches and controllers, see page 174 chapter „Controls“